

Leica DISTO™

# DXT

## Tough enough?

■ **Robust**

The sensitive measuring elements are protected by solid rubber parts. The Leica DISTO™ DXT is therefore particularly resistant.

■ **IP 65**

The housing and keypad are specially sealed against water and dust. Cleaning under running water is also no problem.

■ **Multifunctional end-piece**

Whether measuring out of corners, slots or from edges, with this endpiece you are prepared for all measuring situations. The instrument detects the endpiece automatically, which helps you avoid expensive measuring errors.






The room height is obtained effortlessly at the press of a key.



Extremely robust with IP 65 protection.

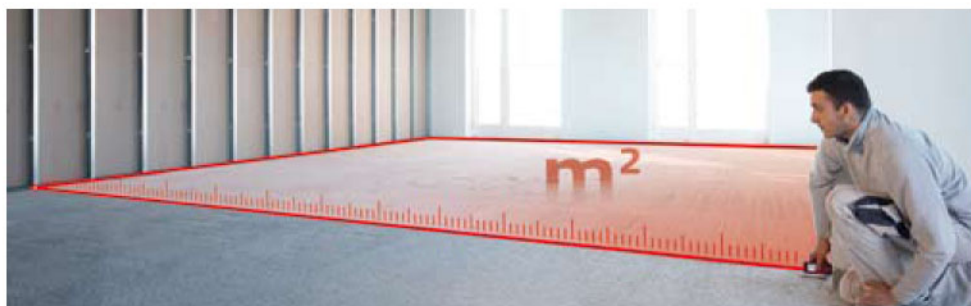

The Leica DISTO™ DXT has a diverse range of functions, e.g. addition, subtraction, area, volume, Pythagoras, continuous measurement, min/max measurement.

### Your advantages at a glance

Measuring range 0.05 to 70 m Typ. accuracy $\pm 1.5$ mm	Precise, quick and reliable measurements
Sealed keypad	For measurements in extremely dusty environments. Easy to clean under running water.
Solid rubber housing	Withstands drop tests from 2 m height
Hard-wearing, illuminated display	Measured values can be read, even in the dark
Flip-out end-piece with automatic detection	Reliable, trouble free and error free measurement from edges or out of corners
Minimum and maximum measurement function	Horizontal and diagonal measurements, e.g. in corners.
Room dimensions	Values such as total wall length, wall and ceiling area are available at the touch of a button
Continuous measurement	Simple and quick staking out
IP 65	Dust tight and protected against jets of water